

# PICKLEBALL

**GENERAL:** Pickleball posts are available with fixed eyes, net tightener, and side pulley or top pulley- depending on model selected. All models consist of a pair of posts, except center posts which are designed for side-by-side courts, & include only one post. All posts are equipped w/ fittings for proper net attachment. **NOTE:** See page 3 & 4 for included accessories and locations.

**MATERIAL:** All materials are selected for strength, durability and the ability to withstand years of exposure.

**POSTS:** A 3-1/2" O.D. heavy-duty galvanized steel post. Overall length of all posts is 64" allowing for 24" of post to be buried in concrete. **NOTE: Post with top pulley is 6" shorter than its mating post to allow for proper net height.**

**ROPE CLAMPS:** A heavy-duty self-securing clamp, die-cast from rustproof "zamak" metal. Designed to take rope sizes 1/8" to 3/8". Designed to take stress off of rope, as it has a smooth grooved track for the rope. **NOTE:** For use on nets with rope suspension.

**NET TIGHTENER W/ REMOVABLE HANDLE:** Permits easy and accurate tensioning of the net. Designed for use on nets with cable or rope suspension. Aluminum cast with a removable handle to lock in place. Pull pin and remove handle.

**SIDE PULLEY:** All welded construction of heavy gauge steel. Finish is either galvanized or powder coated. A 2-1/2" Dia. pulley on a 3/8" diameter shaft guides the net cable or rope to the tightener.


**TOP PULLEY:** All welded construction of either heavy gauge steel galvanized or powder coated. A 2-1/2" Dia. pulley on a 3/8" diameter shaft guides the net cable or rope to the tightener. Top Pulley is NOT adjustable.

**FIXED EYES:** 3/8" diameter zinc-plated steel eyebolts for all models. Heavy steel eyebolts for center post double eyes. These fixed eyes are welded on square post models.

**PICKLEBALL NET:** Measures 36" H x 22' L, Vinyl Coated Polyester 2 Ply Headband. 1-3/4" sq mesh braided 3.0mm polyethylene.

**FINISH:** Cold galvanized compound (or) prepared for powder coat.


**WARRANTY PERIOD:** 10 years

 <p>www.LASTEELCRAFT.com 1-800-371-2438</p>	Date: 7/30/19	<b>SPECIFICATION/INSTALLATION INSTRUCTIONS</b> <i>COMPETITION PICKLEBALL POST W/ NET TIGHTENER, SIDE PULLEY, TOP PULLEY &amp; ROPE CLAMP</i>
	Rev: JN42720	
	Drawn: MT	MODEL NO.
	Sheet: 1 of 4	<b>LA-PBP3-BG</b>


# PICKLEBALL

## LA-PBP3-BG


3-1/2" O.D. GALVANIZED COMPETITION POST (125 lbs)

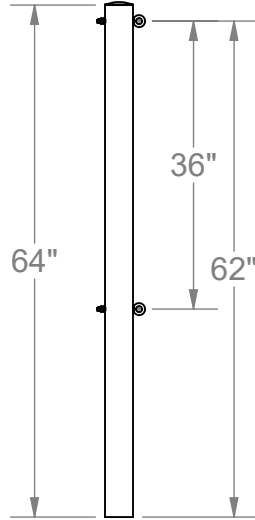

(1) 2202-11  
2 EYEBOLT/NYLOCK

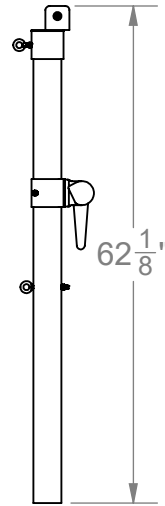

(1) 2202-11-TP  
-1 EYEBOLT/NYLOCK-  
-TOP PULLEY-  
-NET TIGHTENER-

 <p>www.LASTEELCRAFT.com 1-800-371-2438</p>	Date: 7/30/19	<b>SPECIFICATION/INSTALLATION INSTRUCTIONS</b>
	Rev: JN42420	
	Drawn: MT	MODEL NO.
	Sheet: 2 of 4	<b>LA-PBP3-BG</b>



# PICKLEBALL

## INSTALLATION INSTRUCTIONS:

- 1.) Dig holes per footing detail.
- 2.) Install eyebolts onto posts. Note: Cut & peen any excess threads out of nut.
- 3.) Attach Net Tightener to collar with 5/16" x 3/4" Hex Bolt.
- 4.) Slide the net tightener over the post with one eyebolt and secure with setscrew.
- 5.) Secure fittings in place with hex wrench.
- 6.) Set the double eye post in a hole and shim from below so that the top eye is 38" above finish grade.
- 7.) Set the post with the side pulley (Model 2202-20-SP) and shim from below so that the top of the pulley is 38" above finish grade.
- 8.) Pour concrete up to within 2" of finish grade. Let concrete set for 3 days before removing bracing.
- 9.) Cover concrete footings with court materials.

**NOTE: Footing sizes are based on average soil conditions. Loose and/or sandy soil is not average & footing sizes must be increased accordingly to meet local soil conditions.**

ITEM NO.	PART NUMBER	DESCRIPTION	2202-11-TP/QTY.
1	8321-03NT	NET TIGHTENER WITH REMOVABLE	1
2	8321-03TP	3-1/2" I.D. TOP PULLEY	1
3	8321-03SP	3-1/2" I.D. SIDE PULLEY	N/A
4	HWLN38	3/8"-16 Nylock Nut	4
5	HWEB384	3/8"-16 X 4" Eye Bolt	3
6	HWEB381	3/8" x 1 Turned Eyebolt	1
7	HWEB382	3/8" x 2 Turned Eyebolt	1
8	RT-0035-2202-64-G	3-1/2" O.D. PICKLEBALL POST	1
9	RT-0036-2202-59-G	3-1/2" O.D. PICKLEBALL POST	1
10	HWSC3858	3/8" x 5/8" Set Screw	1
11	HWHB51634	5/16" x 3/4" Hex Bolt	2
12	HWFLWA516	5/16" Flat washer	2
13	HWSH516212	5/16" x 2-1/2" S-hook	1
14	VCIPULLEY	2-1/2" x 3/8" Pulley	1

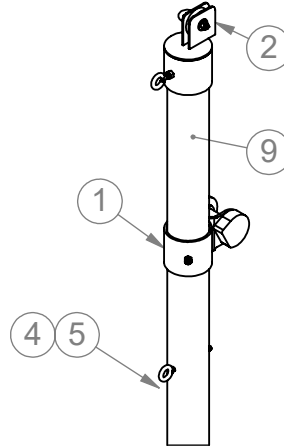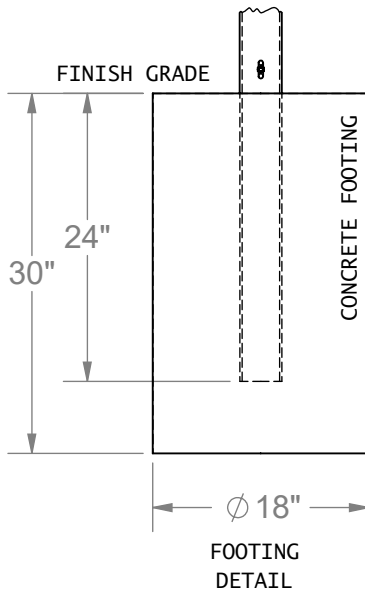

(1) 2202-11-TP  
-1 EYEBOLT/NYLOCK-  
-TOP PULLEY-  
-NET TIGHTENER-



Date: 7/30/19  
Rev: JN42720  
Drawn: MT  
Sheet: 3 of 4


### SPECIFICATION/INSTALLATION INSTRUCTIONS

COMPETITION PICKLEBALL POST W/ NET TIGHTENER, SIDE PULLEY, TOP PULLEY & ROPE CLAMP

MODEL NO.

**LA-PBP3-BG**

# Pickleball Court Diagram

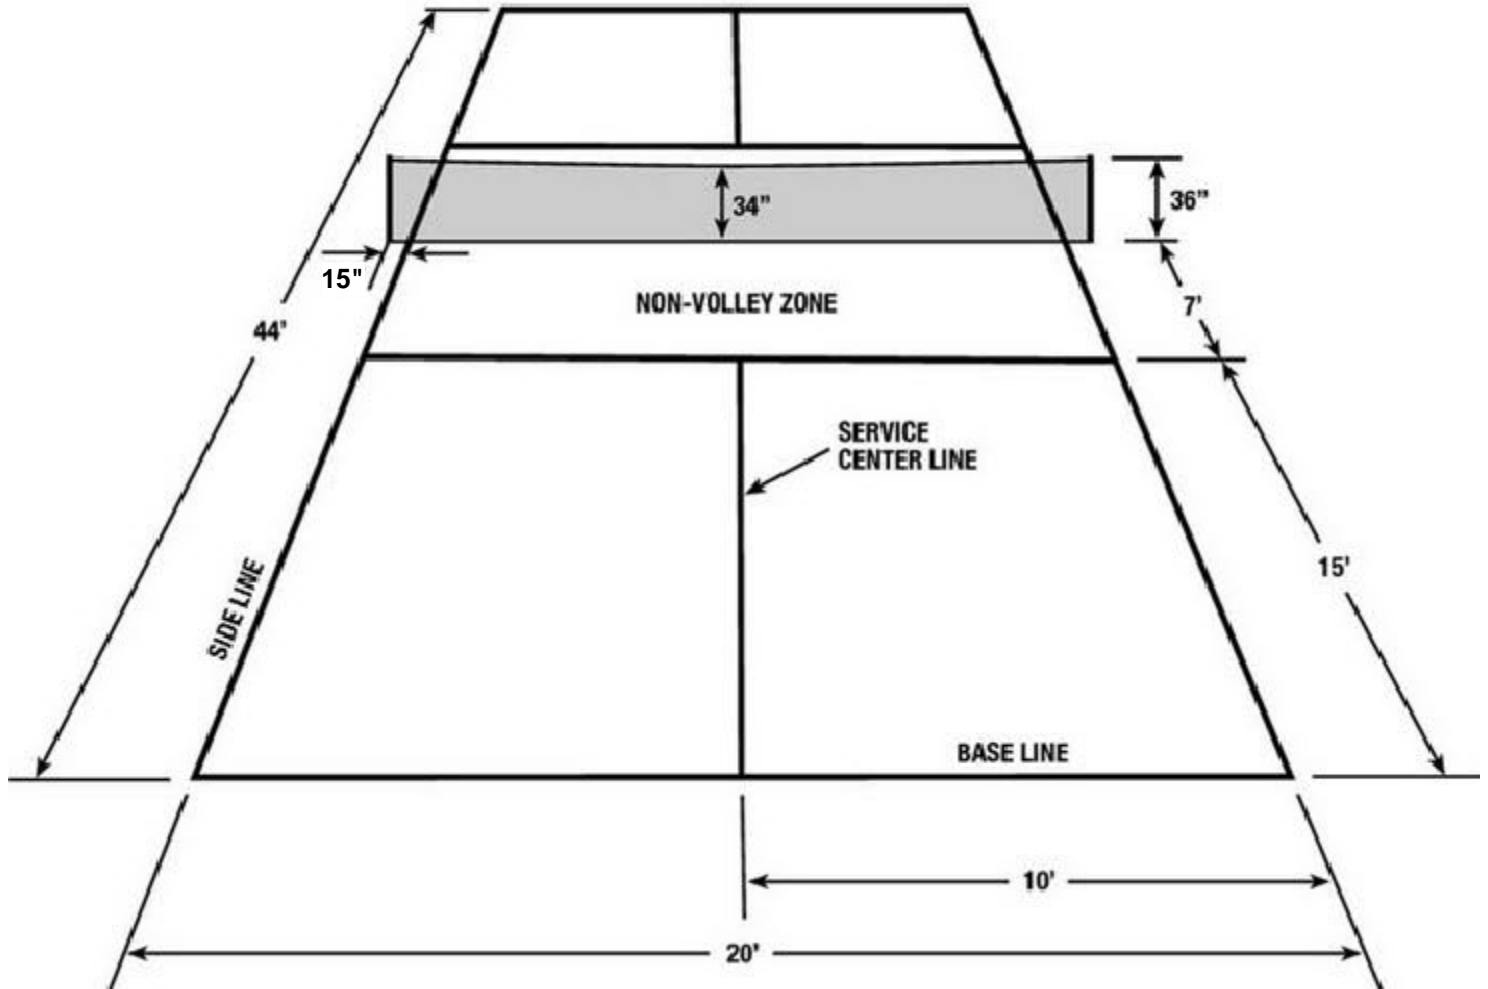

Formula to calculate total depth of footing:  
 $24'' \text{ (Std)} + X \text{ (Extension)} + 6'' = D \text{ (Depth)}$



Date: 7/30/19  
 Rev: JN42720  
 Drawn: MT  
 Sheet: 4 of 4

## SPECIFICATION/INSTALLATION INSTRUCTIONS

COMPETITION PICKLEBALL POST W/ NET  
 TIGHTENER, SIDE PULLEY, TOP PULLEY & ROPE CLAMP

MODEL NO.

**LA-PBP3-BG**