
TP3-2ZT Tennis Post

Posts: The posts are made of 3-1/2" galvanized steel pipe.


Net Tightener: Net tightener allows for easy and accurate tentioning of top cable or rope of the net to set the proper center hieght of the net. The handle is easily removed after tention is set.

Finish: Posts are powder coated in green or black.

Warranty: 10 Year limited.

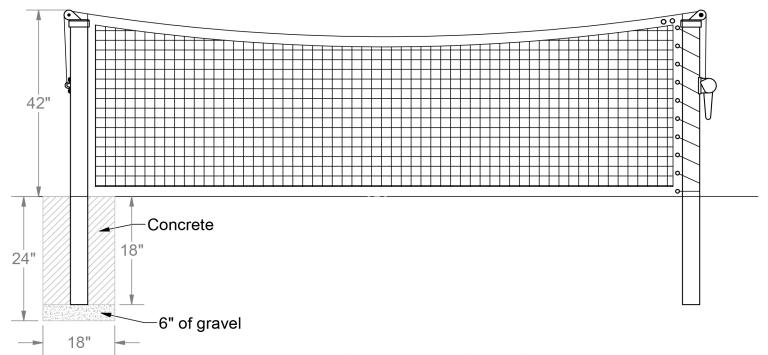


Typical Tennis Net Elevations

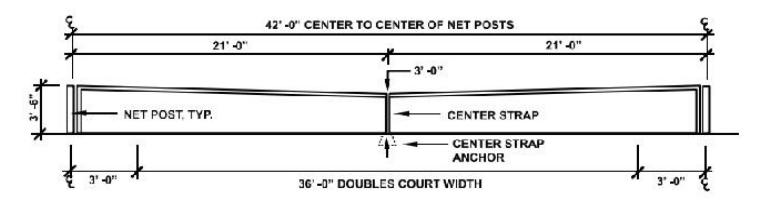

	Date: 1/19/2021		SPECIFICATION / INSTALLATION INSTRUCTIONS	
	Rev: A		Tennis Post Model	
Steel Craft ELEMENTS FOR LIFE OUTSIDE*	Drawn:	JBN	MODEL NO.	
www.LASTEELCRAFT.com 1-800-371-2438	Sheet:	1 of 2	TP3-2ZT	

Installation Instructions:

- 1) Dig footings for poles according to diagram on page 1 42 feet apart center to center.
- 2) Ensure proper height of poles. Plumb and square post, pour concrete and let concrete cure for 3 days before attaching net and putting into service.
- 3) Use the Stainless Steel net guide to bolt the top cable end loop to one pole. Run line over the top pulleys and use the other loop to connect it to the net tightener. Tension the net till the center of the net is 36 inches above the court.
- 4) Use the supplied rope to secure the net to the post by wrapping it through the eyelets and around the post.

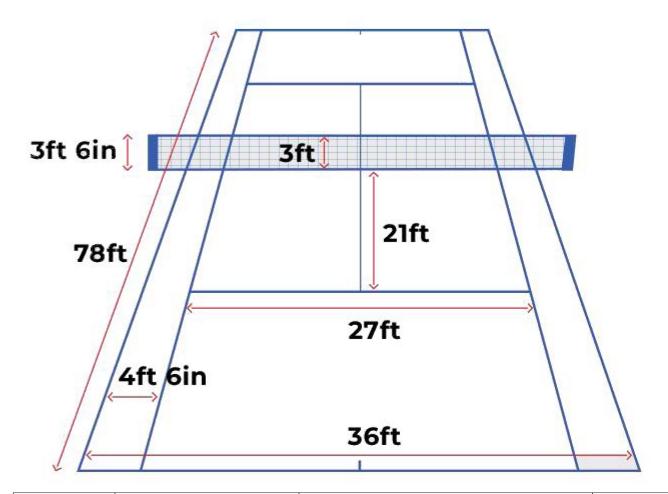

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	
1	RMPIP312	Tennis Post	2	
2	CINETTOP35BLK/GRN	Top Pulley Cap in Black or Green	2	
3	8321NT	Net Tightener Assembly	1	
1 RMPIP312 Tennis Post 2 2 CINETTOP35BLK/GRN Top Pulley Cap in Black or Green 2				
4	LIMILIDEAGA	E/ACT V AT LIAN DAIL	1	

KHWTP - Hardware Kit - Contains the following hardware pcs.						
1	HWHB5161	5/16" X 1" Hex Bolt	4			
2	HWHB516112	5/16" X 1-1/2" Hex Bolt	2			
3	HWSPLW516	5/16" Split Washer	4			
4	HWFLWA516	5/16" Flat Washer	6			
5	HWLN516	5/16 Nylok nut Zinc	2			
6	HWNGSS	Stainless Steel Net Guide	1			
7	HWSC3838	3/8 X 3/8"Set Screw Zinc	6			
8	LA-VCIPULLEY1	Aluminum pulley 7/16" x 1"	2			

