
PBP3-BG Pickleball Post

Posts: The posts are made of 3-1/2" galvanized steel pipe.

Net Tightener: Net tightener allows for easy and accurate tentioning of top cable or rope of the net to set the proper center hieght of the net. The handle is easily removed after tention is set.

Finish: Posts are powder coated in green or black.

Warranty: 10 Year limited.

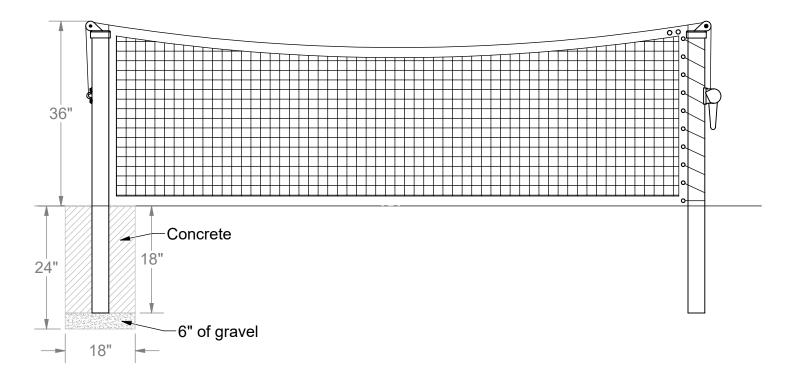


Installation Instructions:

1) Dig footings for poles according to diagram on above 22 feet apart inside of pipe to inside.


2) Ensure proper height of poles. Plumb and square post, pour concrete and let concrete cure for 3 days before attaching net and putting into service.

3) Use the Stainless Steel net guide to bolt the top cable end loop to one pole. Run line over the top pulleys and use the other loop to connect it to the net tightener. Tension the net till the center of the net is 34 inches above the court.

4) Use the supplied rope to secure the net to the post by wrapping it through the eyelets and around the post.

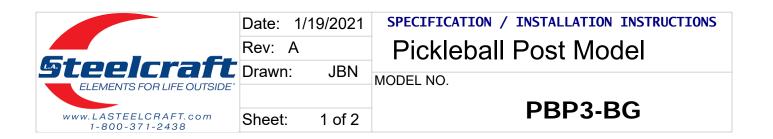

Pickleball court dimensions

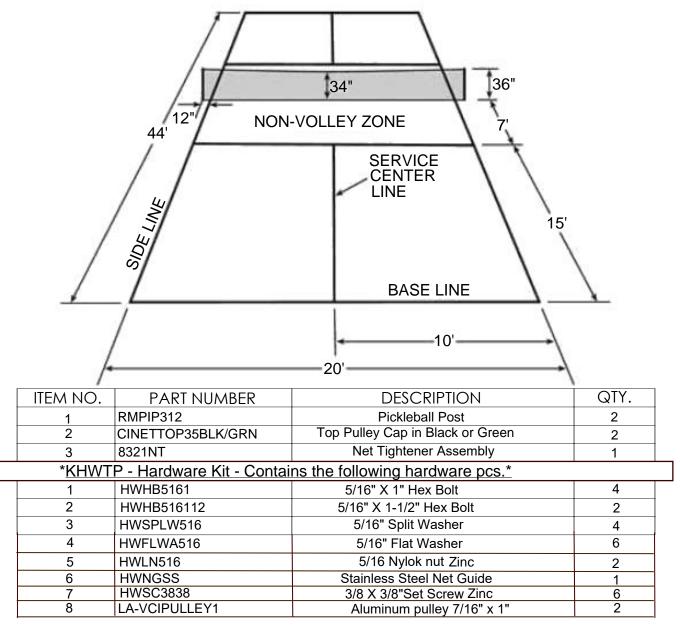

	Date: 1/19/2021		SPECIFICATION / INSTALLATION INSTRUCTIONS	
	Rev: A			
Steelcraft	-			
ELEMENTS FOR LIFE OUTSIDE*	Drawn:	JBN	Pickleball Post Model	
www.LASTEELCRAFT.com 1-800-371-2438	Sheet:	2 of 2	MODEL NO. PBP3-BG	